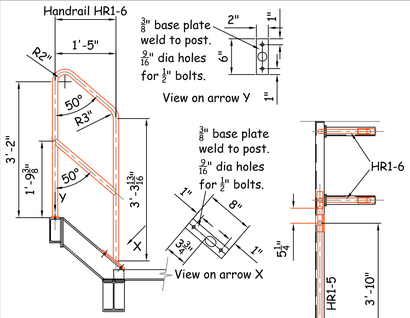





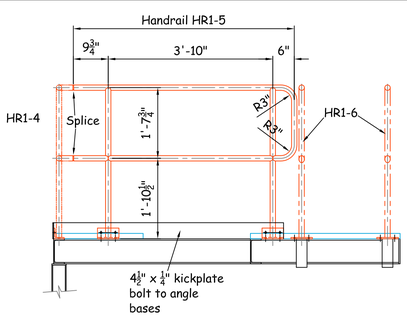

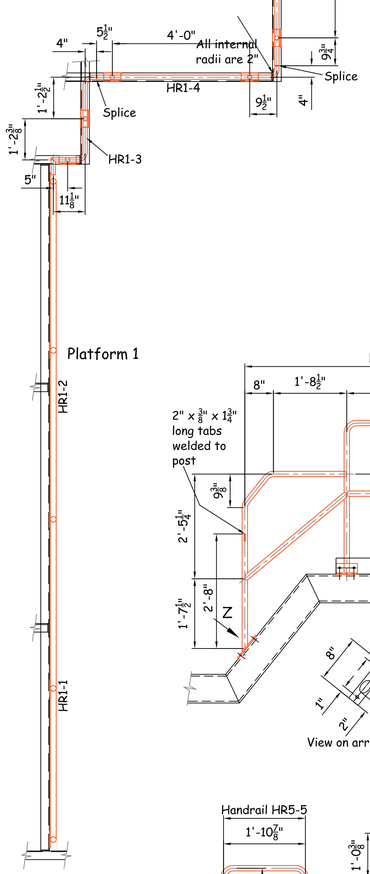

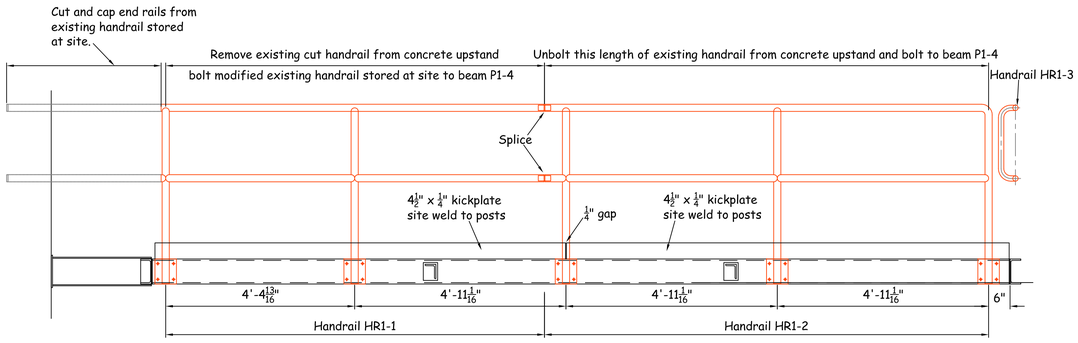

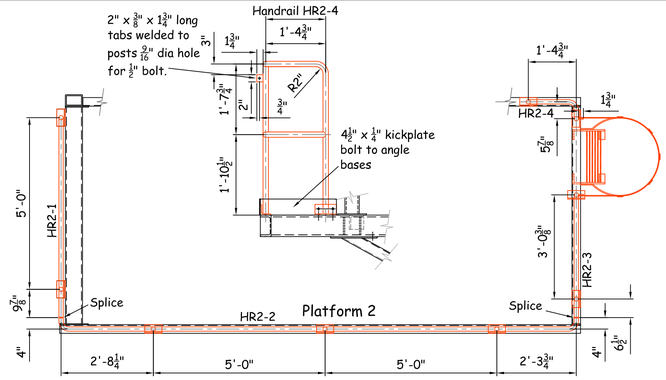

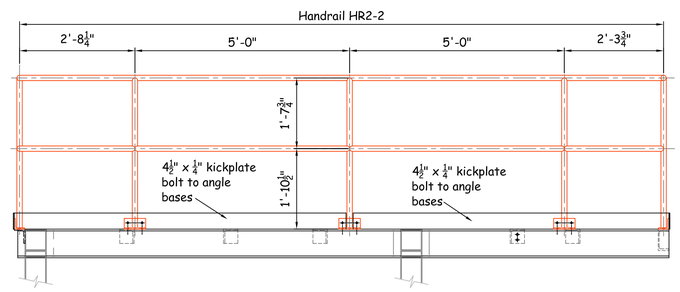

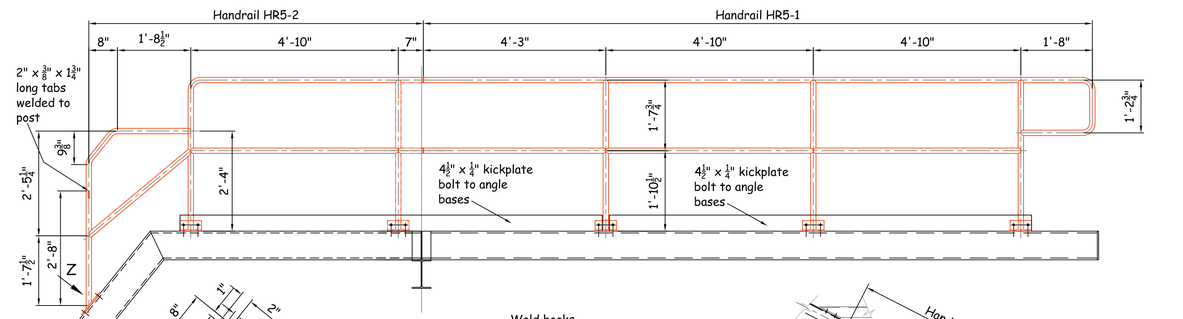

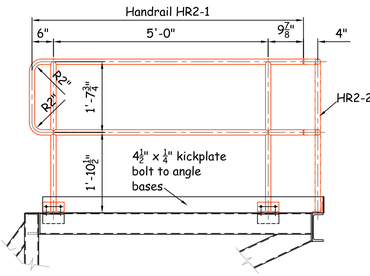

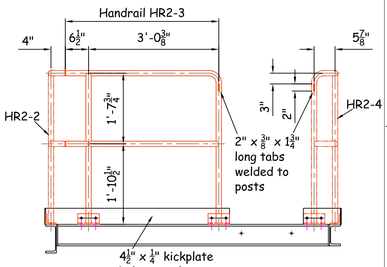

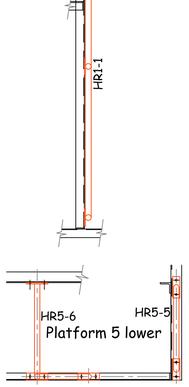



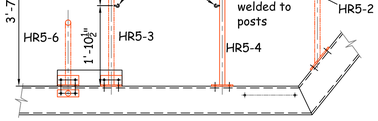

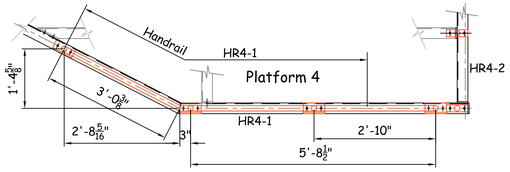

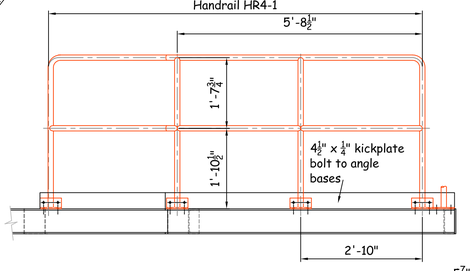





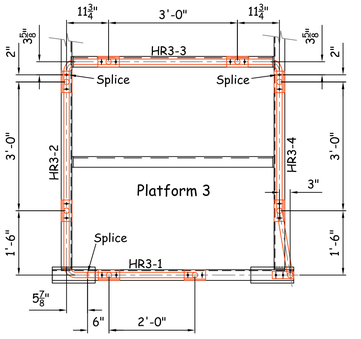







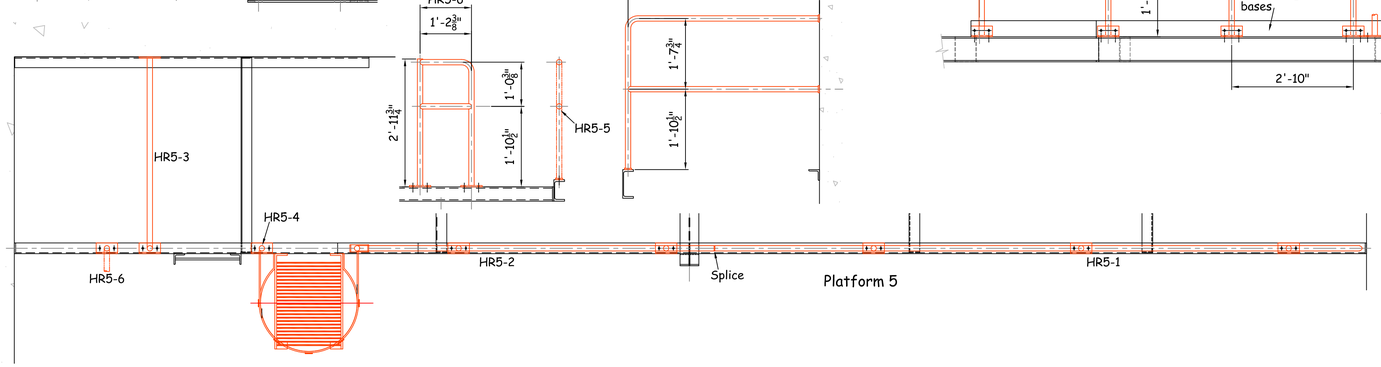



THE MINISTRY OF PUBLIC WORKS

P.O. Box HM525 Hamilton HMCX Bermuda
Phone: (441)278-0546

DEPARTMENT OF
WORKS & ENGINEERING
Fax: (441)296-0818

Notes.

1. All posts and handrails are 1½" OD tube.
2. Base detail 1 typical where shown:





3. Base detail 2 typical where shown:



4. Wall plate detail typical where shown:



5 Typical 2" x ⅜" x 1¾" long tabe detail where shown



6 All welds ¼" fillet

7 See drawing No 11 for ladder and deck details

Handrails shall be hot dip galvanised after fabrication, etch primed and painted orange to match existing.

PROJECT NUMBER:
31 – 355

PROJECT NAME:
TYNES BAY WTE FACILITY EXPANSION
New Turbine Building
TYNES BAY
31 PALMETTO ROAD
DEVONSHIRE

SHEET TITLE:
ACCESS PLATFORMS
Platforms 1-5 handrail details

SHEET NUMBER:
STGP - 10 **Rev - 0**