


Addendum 3

Clarifications

1. Please take note of the supports and bracing which have been highlighted. The bracing will need to be removed when performing the waterwall replacement for Unit #2. Note: This bracing and supports hold the weight of the boiler furnace. The insulation and refractory in these areas will need to be replaced after testing.

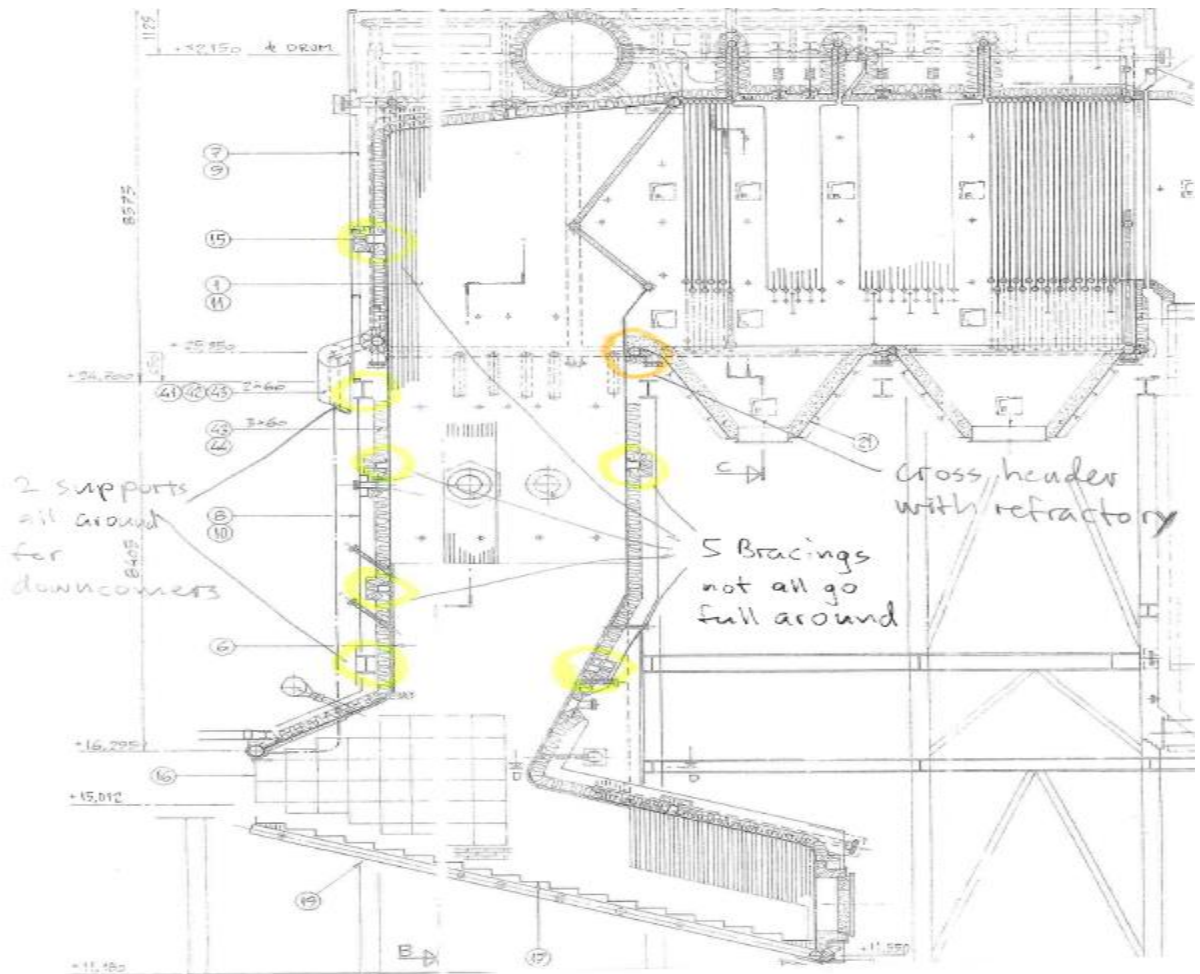

2. Existing probe port location can be found on drawings 324-4084 (Furnace front wall) and 324-4085 (Furnace back wall). Temperature probes are to be removed and replaced with new probes. Probes are as follows 6 probes- Moser TMTAG (AMK051-0320) and four probes (AMK-AF 051-0411) or equivalent.